


Order and Quote Form

Premium Threshold - With Sill Only




Select Grate Style **AA Wave Grate**  **Grate Finish** *for AA only **Standard/Aluminium** **Matte Black** **Beach Gold**

Please note:
Only Aluminium grate is finished, threshold channel is stainless steel

Ti Tile Insert  **Tile Thickness** *For tile insert grate style only **Tiles up to 10mm thick**
Tiles up to 16mm thick (Additional Charge Applies)
Tiles up to 20mm thick (Additional Charge Applies)

Grate/ Tile Insert Width **65mm**
(Minimum door track depth 35mm) O/A Width = 81mm + Door Track Width
100mm
(Minimum door track depth 30mm) O/A Width = 115mm + Door Track Width

Channel + Door Track Dimensions

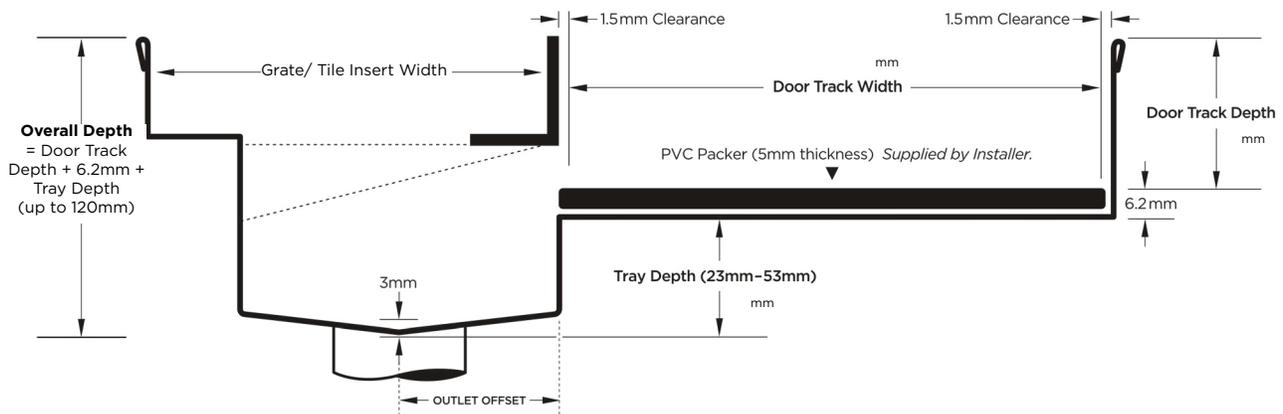


Length + Outlet Requirements
Please include drainage length and all required outlets.

Required Outlet Size
32mm 38mm 44mm 51mm
63mm 76mm 89mm

Optional Components (Additional Charges Apply)
Concrete Ties (50mm x 20mm / 10mm hole)
Electropolishing (recommended for installation in marine or pool area environments)

PLEASE NOTE Minimum channel length equals door track length plus 6mm. Grates longer than 1500mm and Tile Inserts longer than 1200mm are supplied in multiple sections. Channels 3000mm maximum in one piece, channels over 3000mm are supplied in multiple sections with joiner. See AS3500 standard & local regulator for specific outlet & drainage requirements.
 +/- 2mm tolerance on dimensions.

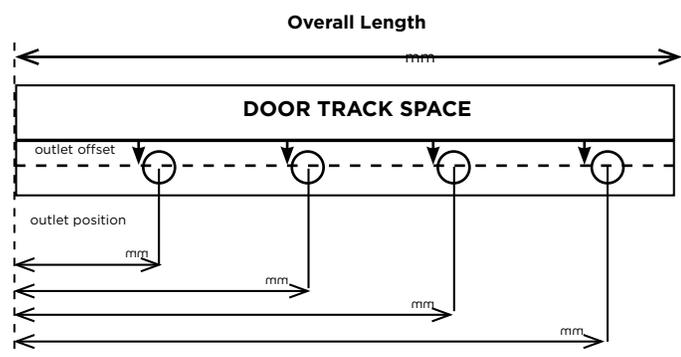

Full Name _____ Email Address _____

Company Name _____ Order Number _____ Stormtech Quote Number _____

Telephone _____ Signature _____